









赫兹电力

HERTZ POWER


产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望








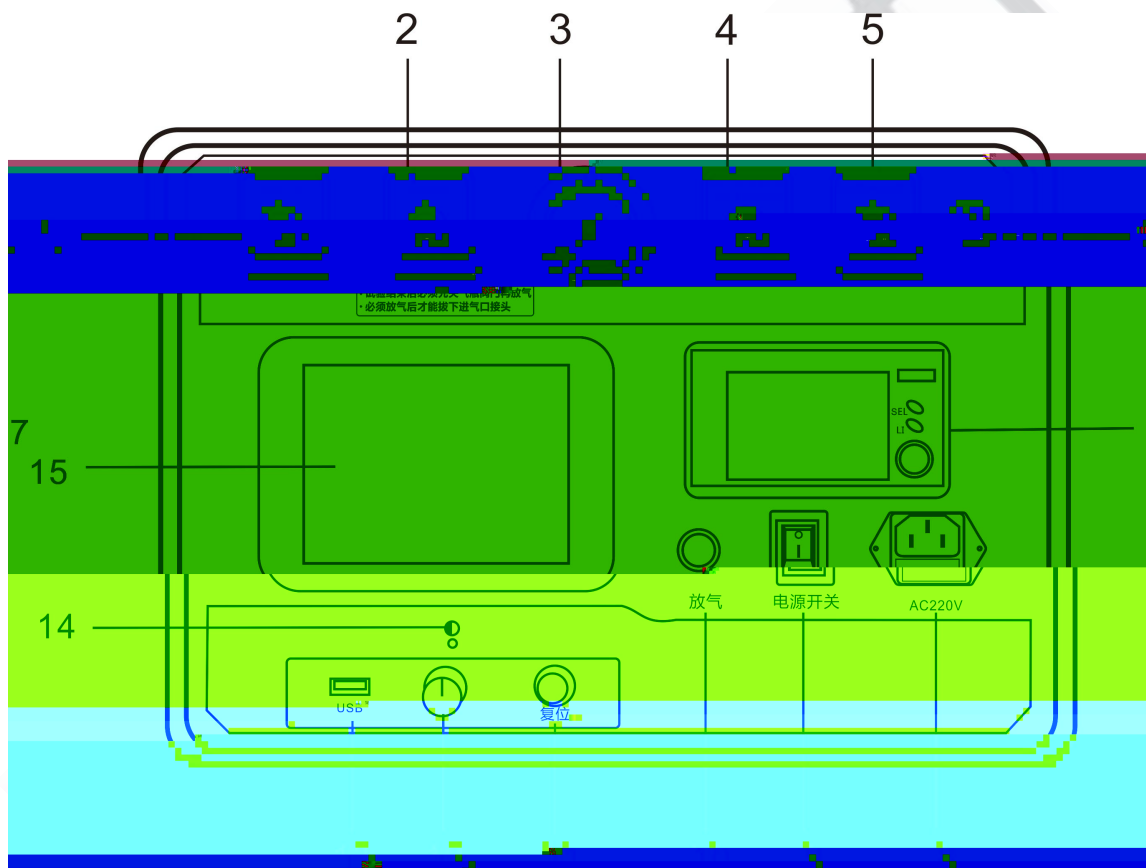

SF6密度继电器校验仪

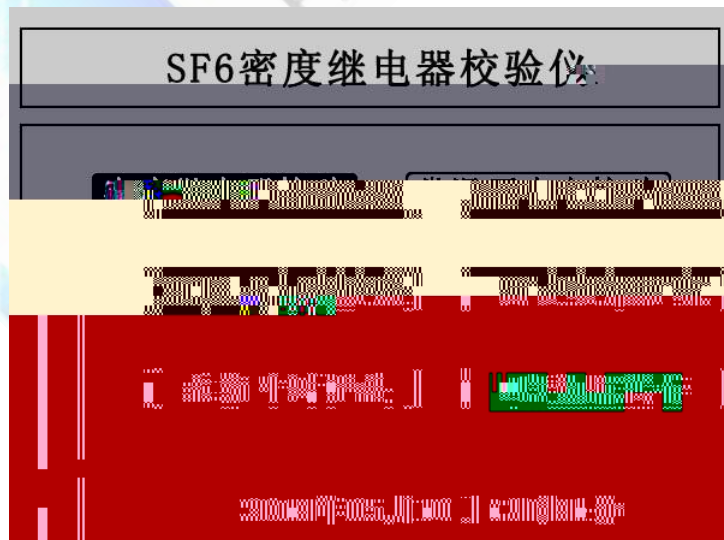



3+

ES0001 60V/0.02

ES0001 60V/0.02

È


HEP 00 E

0001 60V/0.02

系统状态：数据转存中... 15%

系统状态：数据转存成功

文件名为：05101410. SF

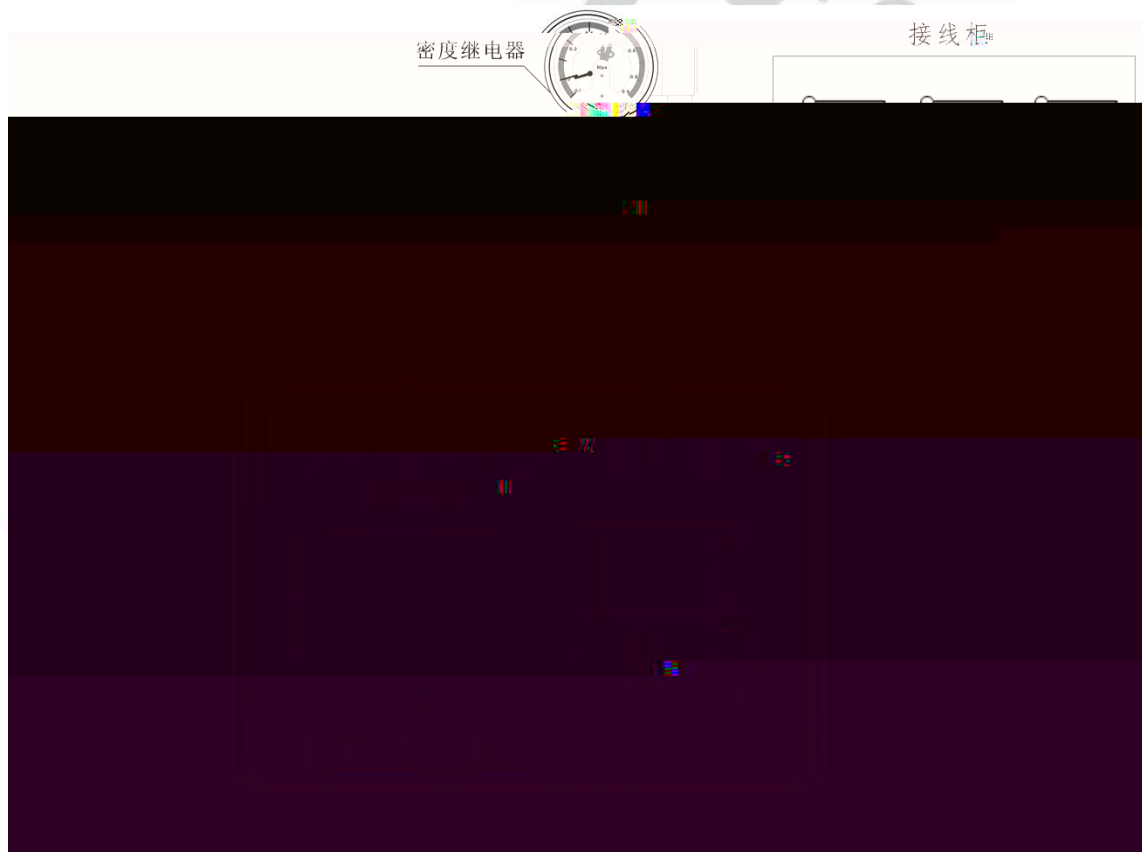

【密度继电器校验】

参
数
设

上限压力： **0.100** (MPa)

检测次数： 1

温度补偿： 无补偿





2014年05月10日13时45分 22.1℃

报警回复值(MPa) Pt 0.474	报警值(MPa) Pt 0.446
P ₂₀ 0.470	P ₂₀ 0.442
闭锁回复值1(MPa) Pt 0.425 P ₂₀ 0.421	闭锁值1(MPa) Pt 0.410 P ₂₀ 0.406
闭锁回复值2(MPa) Pt 0.425 P ₂₀ 0.421	闭锁值2(MPa) Pt 0.410 P ₂₀ 0.405

1次：降压... 停止 保存 打印 返回

2014年05月10日13时47分 22.1℃

报警回复值(MPa) Pt 0.474 0.475 0.475 P ₂₀ 0.470 0.471 0.471	报警值(MPa) Pt 0.446 0.445 0.445 P ₂₀ 0.442 0.441 0.441
闭锁回复值1(MPa) Pt 0.425 0.424 0.425 P ₂₀ 0.421 0.420 0.421	闭锁值1(MPa) Pt 0.410 0.410 0.410 P ₂₀ 0.406 0.406 0.406
闭锁回复值2(MPa) Pt 0.425 0.424 0.425 P ₂₀ 0.421 0.420 0.421	闭锁值2(MPa) Pt 0.410 0.410 0.410 P ₂₀ 0.406 0.406 0.406

检测完成. 启动 保存 打印 返回





赫兹电力



HERTZ POWER

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望



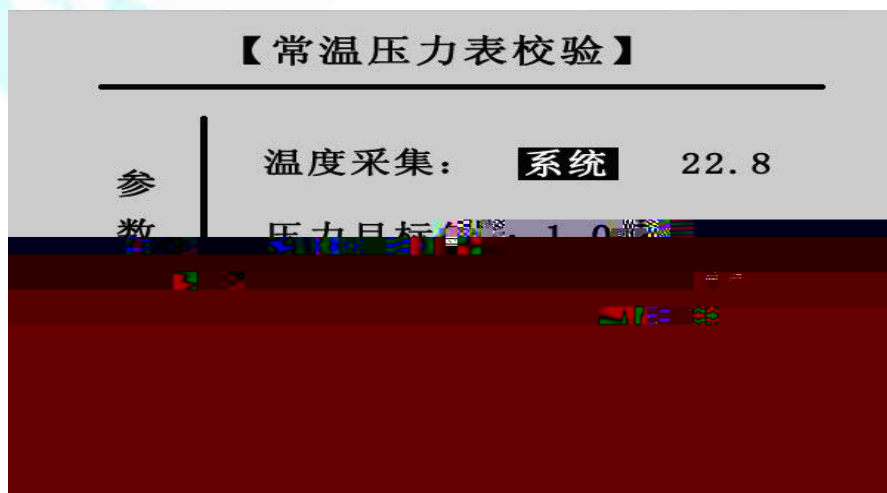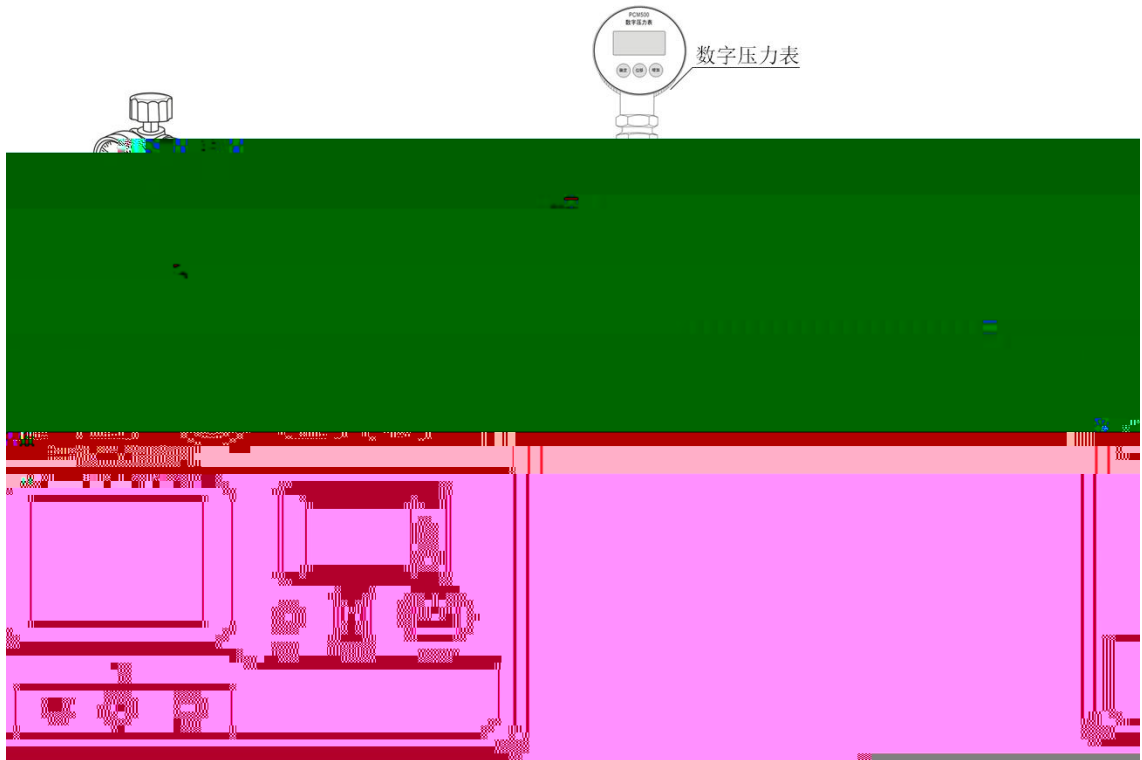

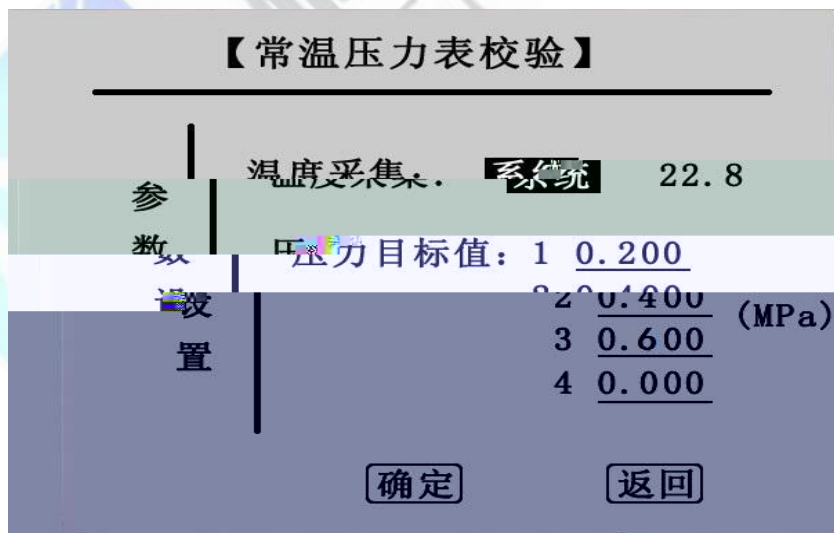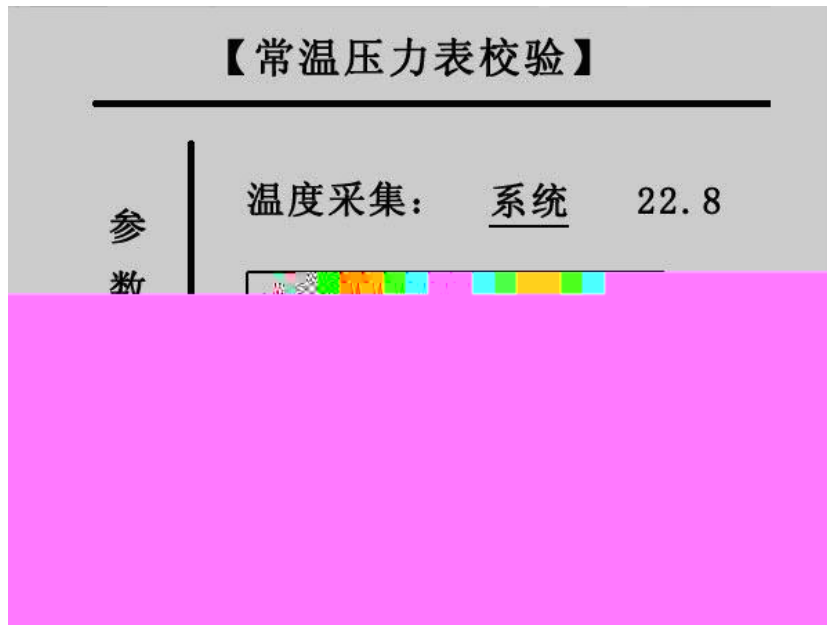



常温压力表校验

	1	2	3	4	单位
当前值Pt	0.000	0.000	0.000		MPa
输入值Pt	0.000	0.000	0.000		

常温压力表校验

	1	2	3	4	单位
当前值Pt	0.200	0.000	0.000		MPa
输入值Pt	0.000	0.000	0.000		

检测完毕.

启动 微充 微放 输入
确定 保存 打印 返回

2014年05月10日13时51分 22.9℃



常温压力表校验

	1	2	3	4	单位
当前值Pt	0.200	0.000	0.000		MPa
输入值Pt	0.000	0.000	0.000		
误差值Pt	0.000	0.000	0.000		

[自动]

[输入]


[退出]

常 温 压 力 表 校 验					
	1	2	3	4	单位
当前值Pt	0.214	0.000	0.000		MPa
输入值Pt	0.213	0.000	0.000		
误差值Pt	0.001	0.000	0.000		
自动 输入 退出					
0.0000 0.0000 0.0000					



常温压力表校验						
	1	2	3	4	单位	
当前值Pt	0.213	0.408	0.618		MPa	
输入值Pt	0.213	0.408	0.618			
误差值Pt	0.001	0.000	0.001			
检测完毕.						
启动微充微放输入 确定保存打印退出						

20度压力表校验						
	1	2	3	4	单位	
Pt	0.000	0.000	0.000	0.000	MPa	
输入值Pt	0.000	0.000	0.000	0.000		
误差值Pt	0.000	0.000	0.000	0.000		
检测完毕.						
启动微充微放输入 确定保存打印退出						

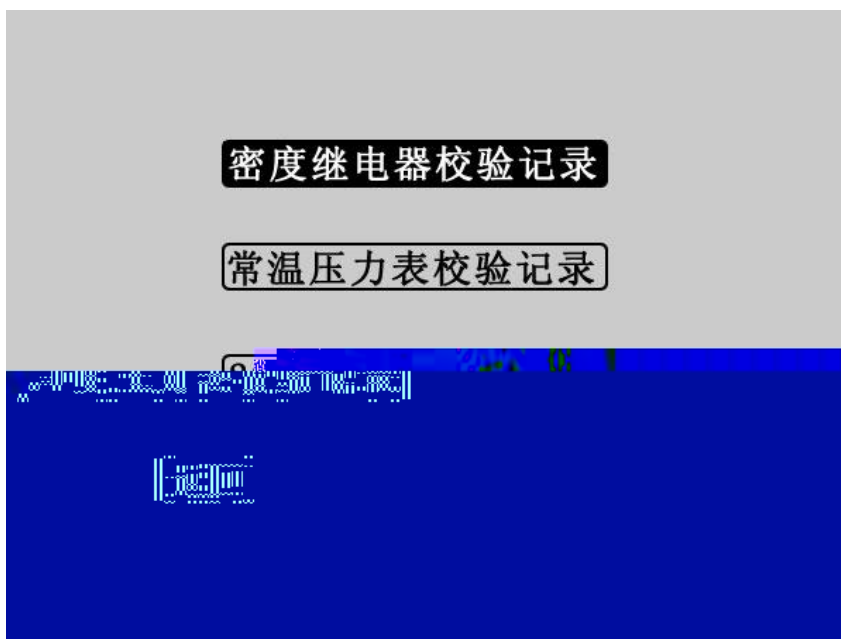

密度继电器校验记录			
组数	时间	温度	次数
第01组	2014-05-09 15:18	21.9系统	3
第02组	2014-05-09 15:35	23.1系统	1
第03组	2014-05-09 16:08	21.8系统	2
第04组	2014-05-09 16:08	21.6系统	1
第05组	2014-05-09 17:10	21.1系统	1

▲▼ 查看 删除 打印 返回

密度继电器校验记录

组数	时间	温度	次数
第01组	2014-05-09 15:18	21.9℃	3

2014年05月09日15时18分 21.9℃

报警回复值(MPa) Pt 0.475 0.474 0.475 P ₂₀ 0.471 0.470 0.471	报警值(MPa) Pt 0.445 0.445 0.445 P ₂₀ 0.441 0.441 0.441
闭锁回复值1(MPa) Pt 0.425 0.425 0.424 P ₂₀ 0.421 0.421 0.420	闭锁值1(MPa) Pt 0.410 0.410 0.410 P ₂₀ 0.407 0.407 0.407
闭锁回复值2(MPa) Pt 0.425 0.425 0.424 P ₂₀ 0.421 0.421 0.420	闭锁值2(MPa) Pt 0.410 0.410 0.410 P ₂₀ 0.407 0.407 0.407

打印

返回





“E”


-
-

名称	大小	类型
① CONFIG.INI	102 KB	ActiveX 控件
② 全自动SF6密度继电器校验仪配套工具软件.exe	1,431 KB	应用程序
③ 说明书.doc	3,596 KB	Microsoft Word ...

~ Eoç · Ðå€p#Ða€..Ð Å

以管理员身份运行(A)

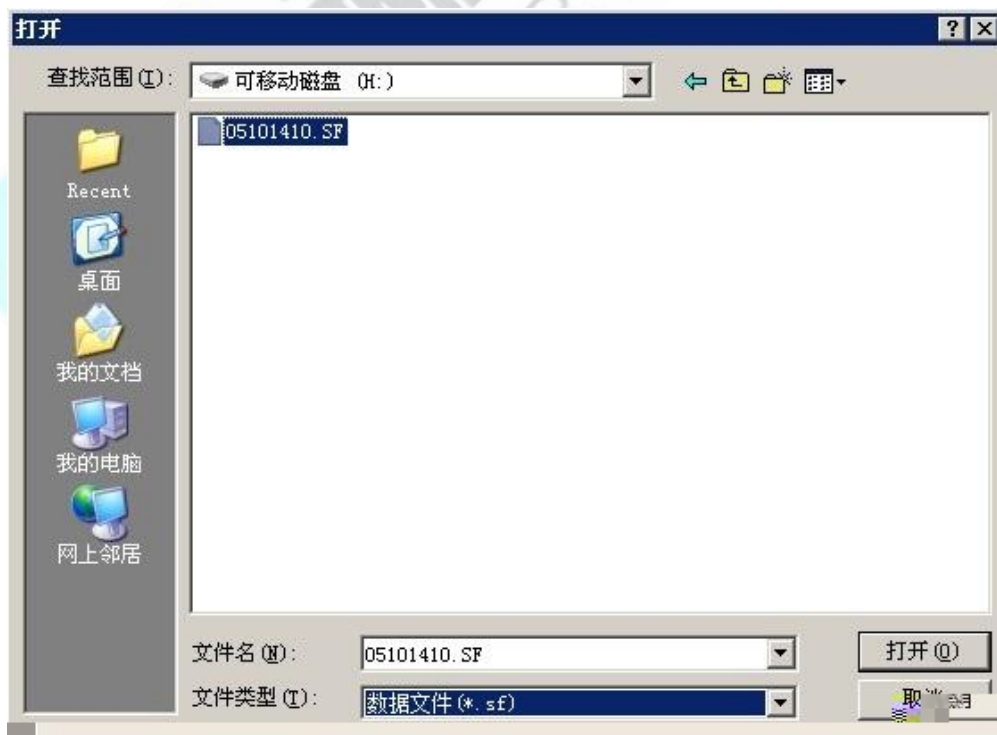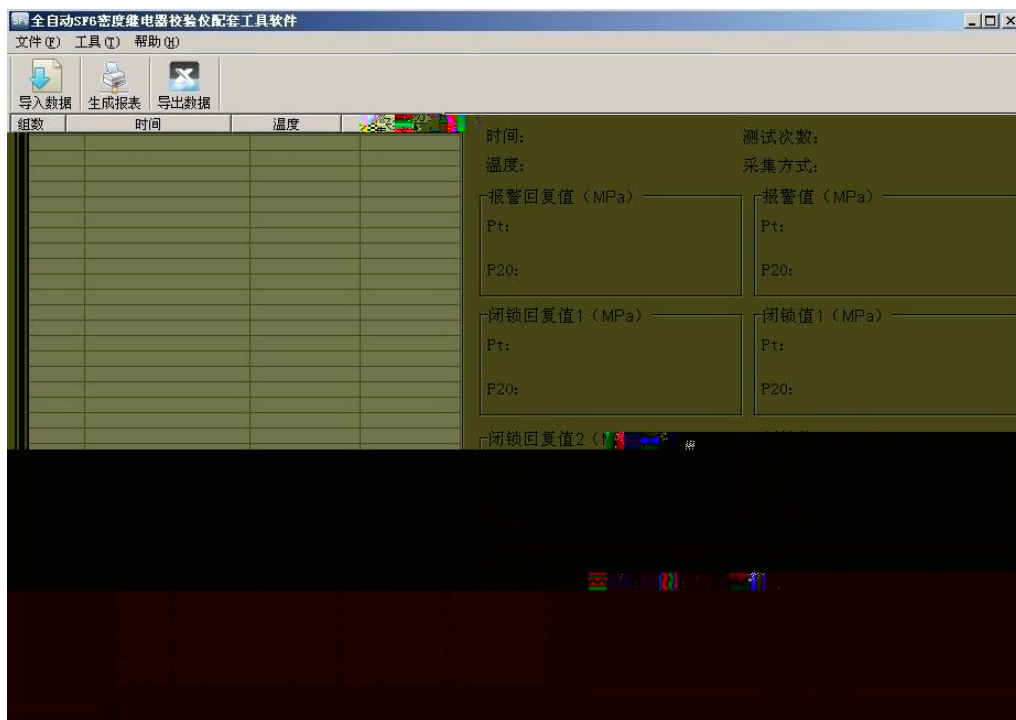

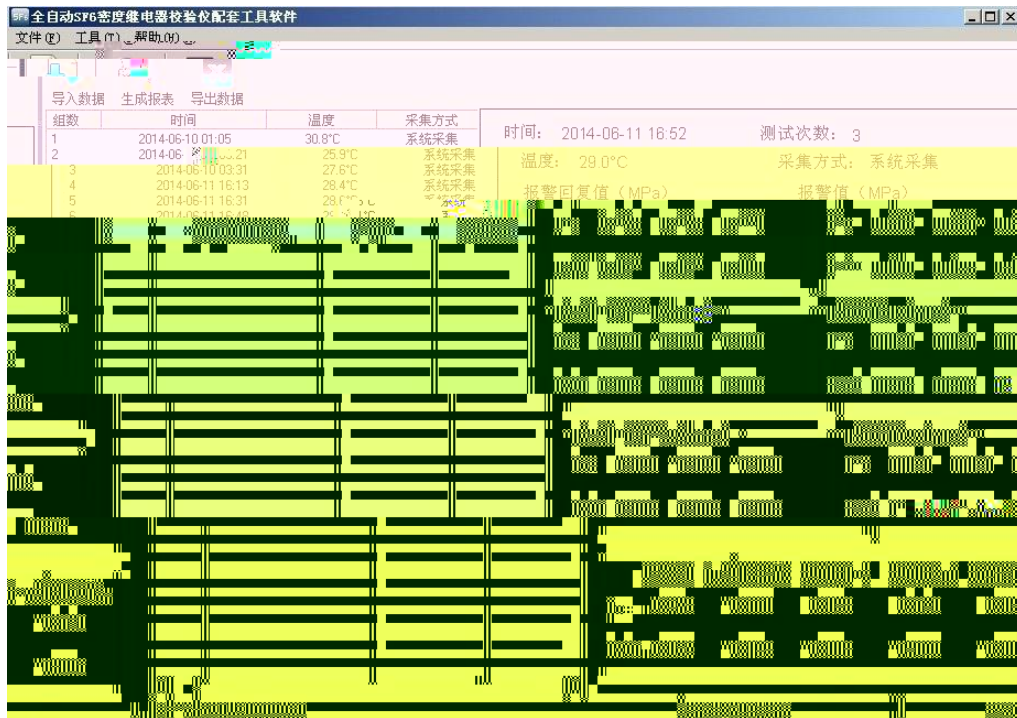

生成报告

报表标题 SF6密度继电器校验报告

校验单位 国网电力公司

送检单位 XXX换流站

校验日期 2014-06-13 打印日期 2014-06-13

继电器信息

继电器名称 1#开关继电器


型号 ABB

编号 20140612

生产日期 2014-06-03


校验 张三 审核 李四 审批 王五

确定 取消

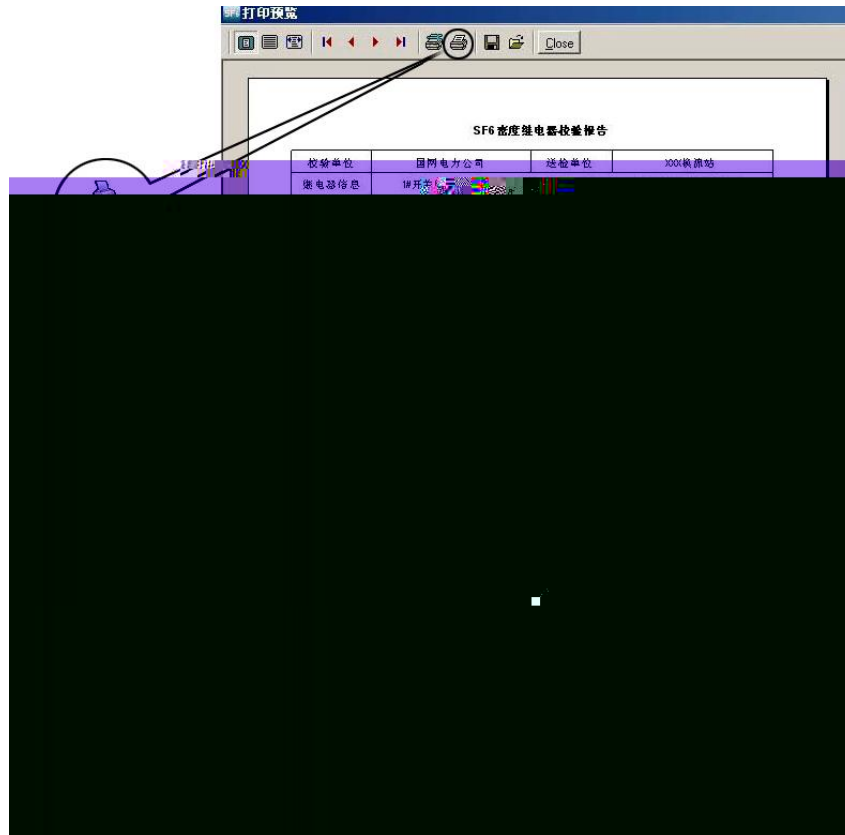



	A	B	C	D	E	F	G	H
1	组数	时间	温度	采集方式	测试次数	P20均报警值	P20均闭锁值1	P20均闭锁值2
2	1	2014-06-10 01:05	30.8°C	系统采集	1	0.426	0.393	0.393
3	2	2014-06-10 03:21	25.9°C	系统采集	3	0.434	0.400	0.400
4	3	2014-06-10 03:31	27.6°C	系统采集	3	0.432	0.398	0.398
5	4	2014-06-11 16:13	28.4°C	系统采集	3	0.431	0.397	0.397
6	5	2014-06-11 16:31	28.6°C	系统采集	3	0.441	0.396	0.396
7	6	2014-06-11 16:48	28.6°C	系统采集	3	0.441	0.396	0.396



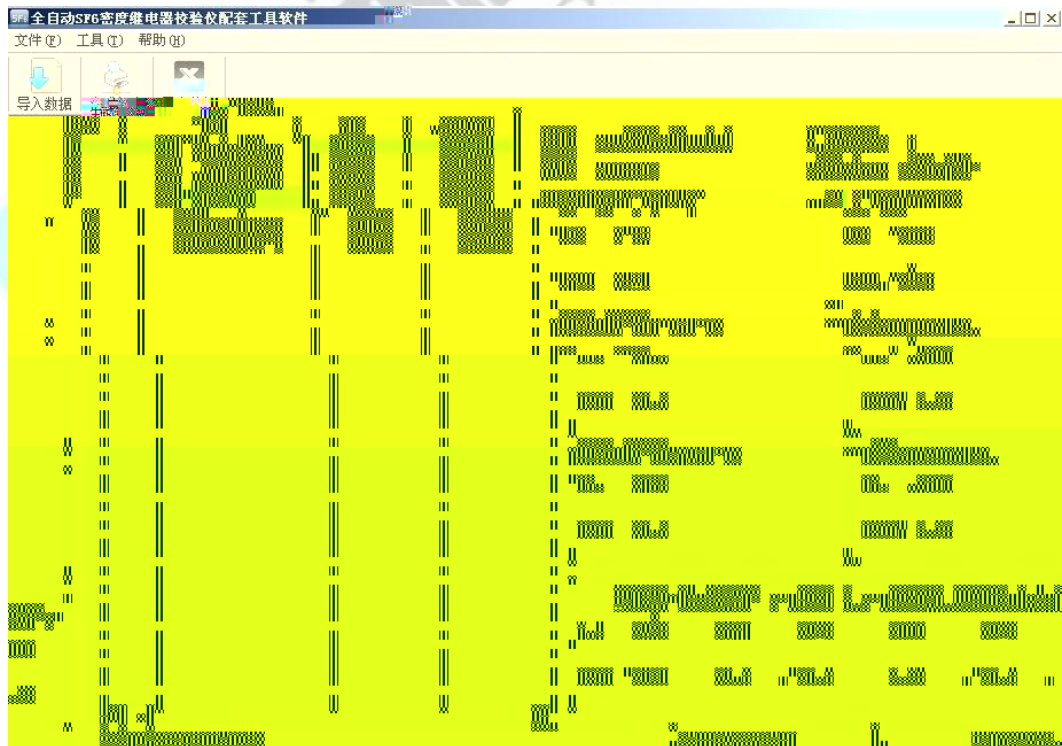


全自动SF6密度继电器校验配套工具软件

文件(F) 工具(T) 帮助(H)

导入数据

The main display area shows a complex waveform or data plot, likely representing the calibration results or test data for the SF6 density relay.

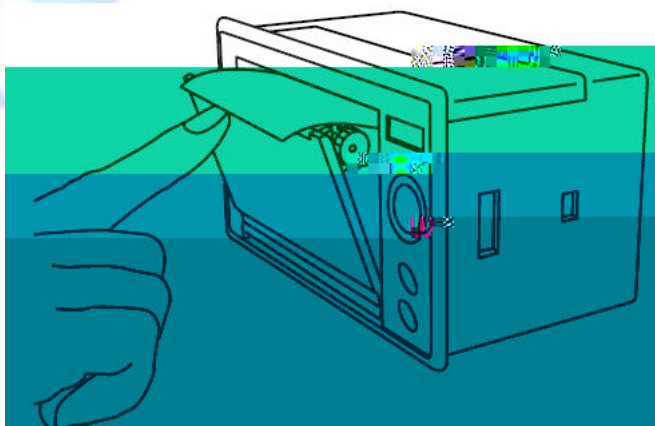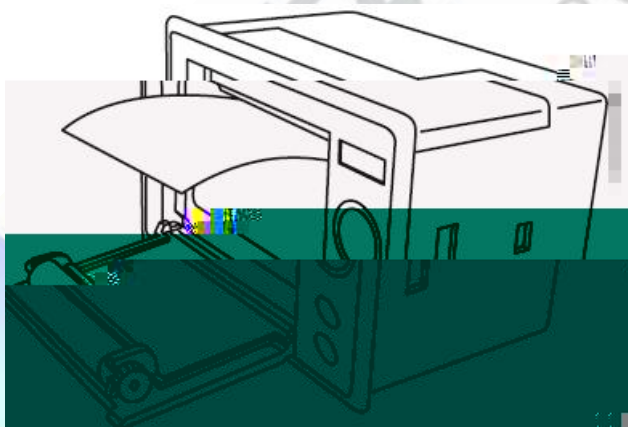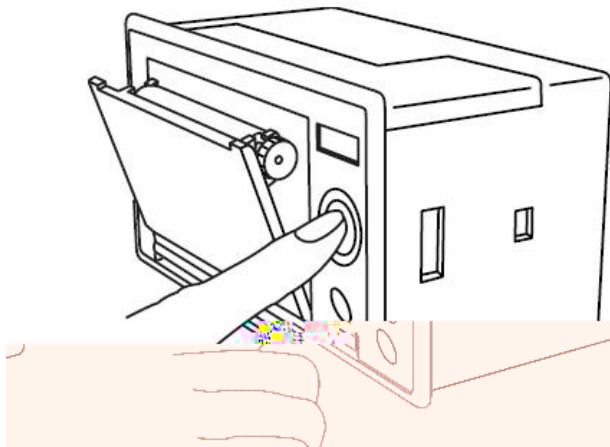



 平开（常用） ⑤  大西开	②  西门子/阿尔斯通（常用）	③  西门子110KV（常用）	④  小西开	⑨  充气转接头
	⑥  西开/沈开/北开	⑦  泰开（常用）	⑧  ABB LTB 145D1/8	



