



赫兹电力

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望





赫兹电力

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望





		4
		4
		4
		
1		
2		
3		
		
		
1		
2		
3		10
		11
1		11
2		11
3		11



赫兹电力

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望



--	--	--	--




	AC 0.00V 00V	AC 0.01V	(0.)
	AC 0.0mA 10.0A	AC 0.1mA	(0.)
	0.0° 3 0.0°	0.1°	1°
	4 .00Hz .00Hz	0.01Hz	(1.0)
	0.0W kW()	0.1W	(1.0)
	0.0VAR kVAR()	0.1VAR	(1.0)
	0.0VA kVA()	0.1VA	(1.0)
	-1 1	0.001	0.03
	1 /		
	TF 1 G 12 M FLASH		
	HOLD		
	2m	2m	
	00K		
	1 0mA	24	
	4.2V		
	320mm 2 1mm 13 mm		
	Φ mm	140mm	40mm
	3.4kg()		



欢迎使用

系统初始化中，请稍后……

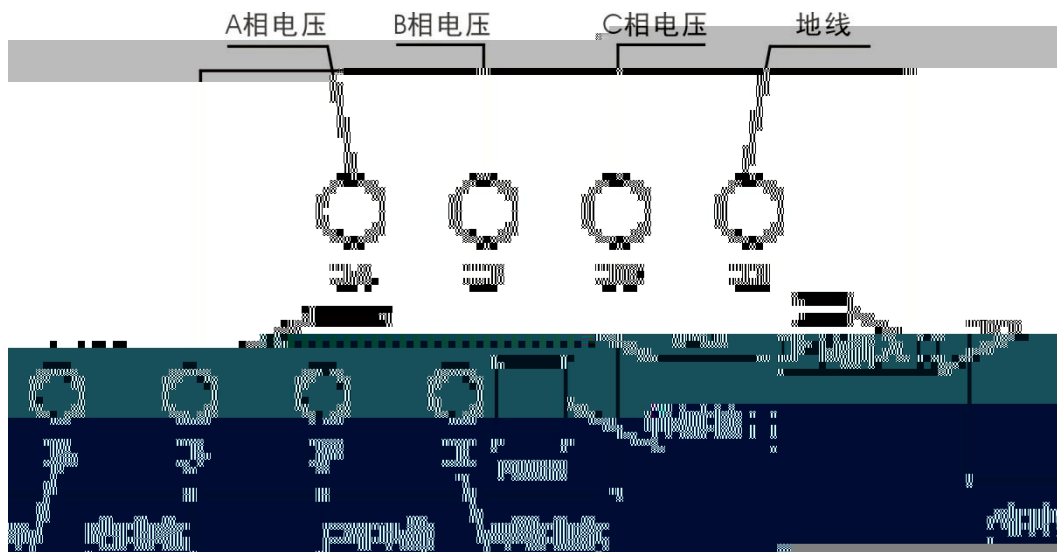

2

伏安/相位

功率

向量图

三相四线

HOLD

查看

保存

伏安/相位

伏安/相位	功率	向量图	向量图
09:10:28	A路	B路	C路
电压 (V)	100.00	100.00	100.00
电流 (A)	5.0020	5.0020	5.0020
相位 (°)	60.01	60.01	60.01
COS φ	0.5000	0.5000	0.5000
频率 (HZ) = 50.00			
	A	B	C
电压相位	0相位基准	120.00	120.00
电流相位	120.00	120.00	120.00
三相四线	HOLD	查看	保存

功率




赫兹电力

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望

伏安/相位	功率	向量图	
09:10:28	有功功率	无功功率	视在功率
A 相	500.21	0.0000	500.21
B 相	500.23	0.0000	500.23
C 相	500.27	0.0000	500.27
三相合	1500.71	0.0000	1500.71
有功率单位 W 频率 (HZ) =50 .00 无功功率单位 VAR 视在功率单位 VA			
三相四线	HOLD	查看	保存

向量图

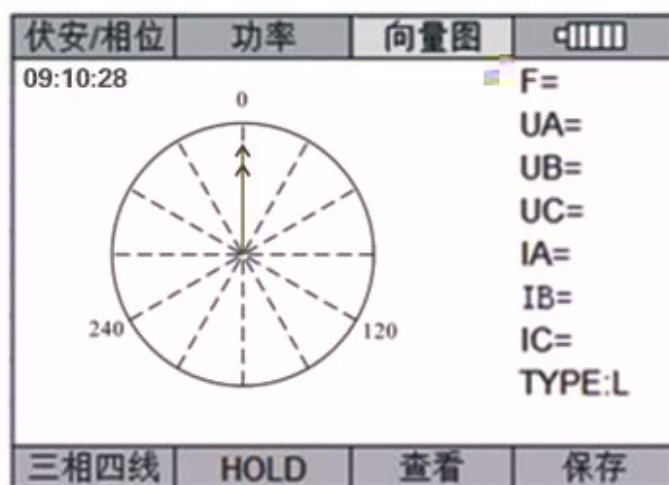



服务宗旨: 快速响应, 达到满意, 超过期望

伏安/相位	功率	向量图	
Page=00	A路	B路	C路
电压 (V)	100.00	100.00	100.00
电流 (A)	5.00	5.00	5.00



[illegible]







赫兹电力

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望

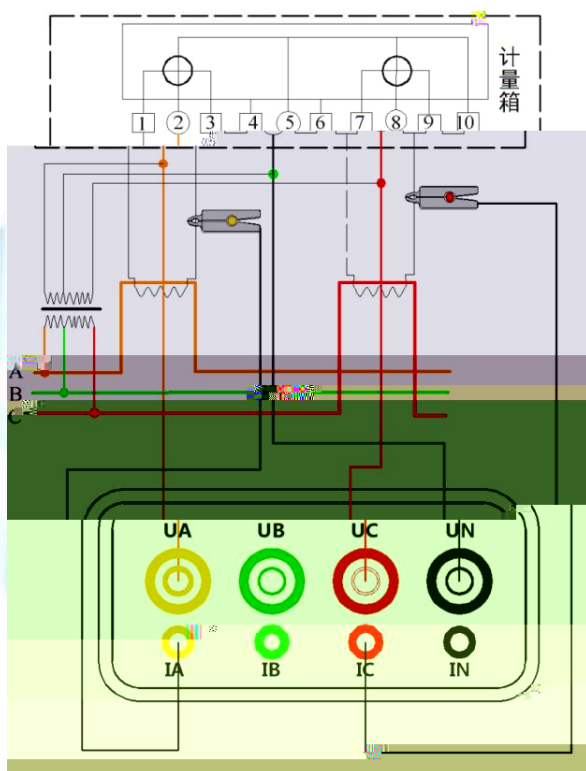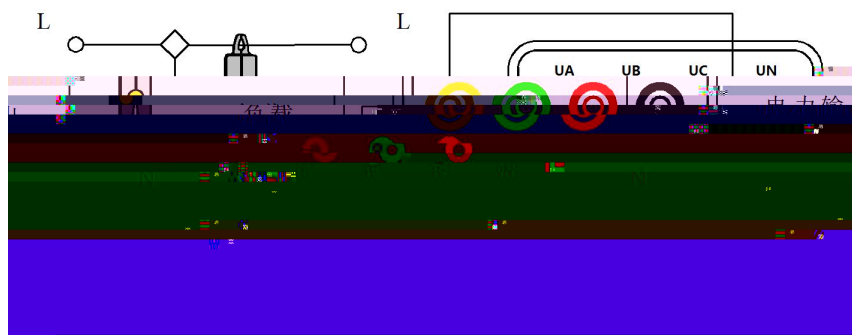

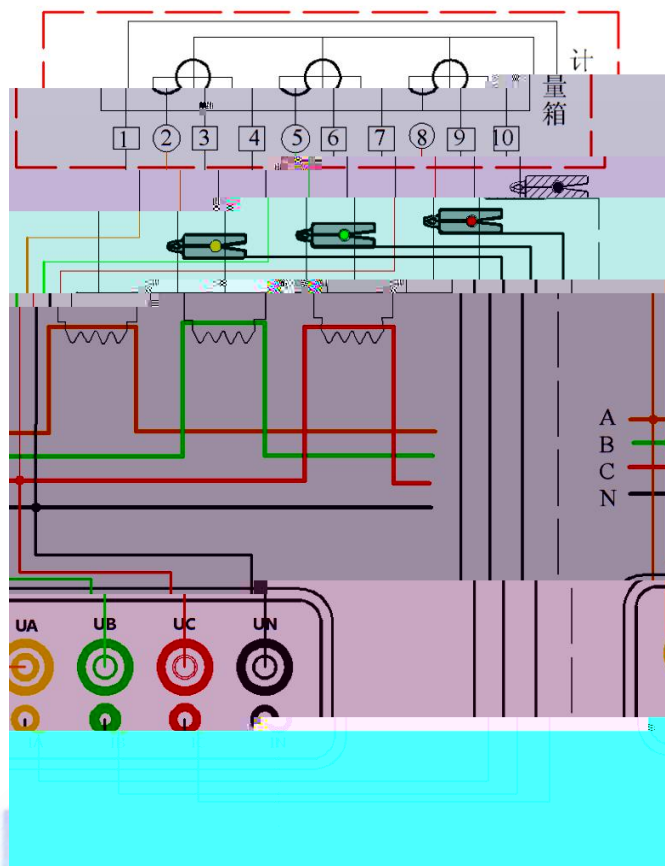

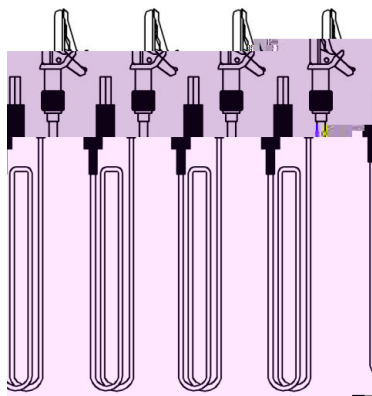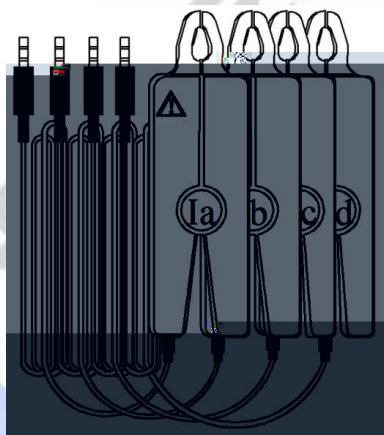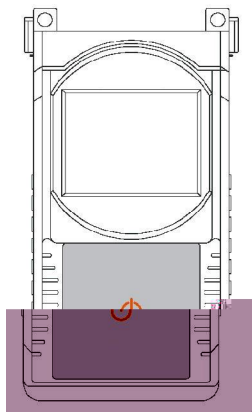



赫兹电力

产品宗旨：技术领先，质量可靠，轻便易用

服务宗旨：快速响应，达到满意，超过期望

