

HZHX-Y

高压无线核相仪

产 品 说 明 书

武汉赫兹电力设备有限公司

HZHX-Y



—



•

•

•	2	2
---	---	---

•

600V

•

35kV

(

35kV

110kV

)

•

•

•

•

•

•

•

•

•

•

•

•



一、简介

HZHX-Y

3.5

“ X Y ”

160m 10V 550kV 35kV
35kV

二、技术规格

DC 3.7V USB 10

315MHz 433MHz

160m

3.5

AC 10V 550kV

0.0 ° 360.0 °

45Hz 75Hz

0.1 ° 0.1Hz

(23 ± 5 80%RH) ≤ ± 10 °

≤ ± 2Hz

: 30 ° 30 ° : 90 ° 150 ° 210 ° 270 °

X

Y

3 0.6 ()

9999

35kV 110kV (

)

35kV 110kV ()

“ -- -- ”

225

027-83267669



2 /

145mm × 60mm × 48mm

250mm × 100mm × 40mm

HOLD

HOLD

ESC

ENTER

“ ---- ”

15

3.2V

35mA max

300mA max

205g()

395g()

1kg

5.4kg()

-10 40 80%Rh

-10 60 70%Rh

433MHz 315MHz

AC 110kV/rms(5)

2000V/rms()

2000V/rms()

IP63

GB13398 92 GB311.1 311.6 8 3DL408 91


1kV 35kV

DL/T971-2005

IEC61481 A2:2004 IEC 61243 1 ed.2:2003





三、结构

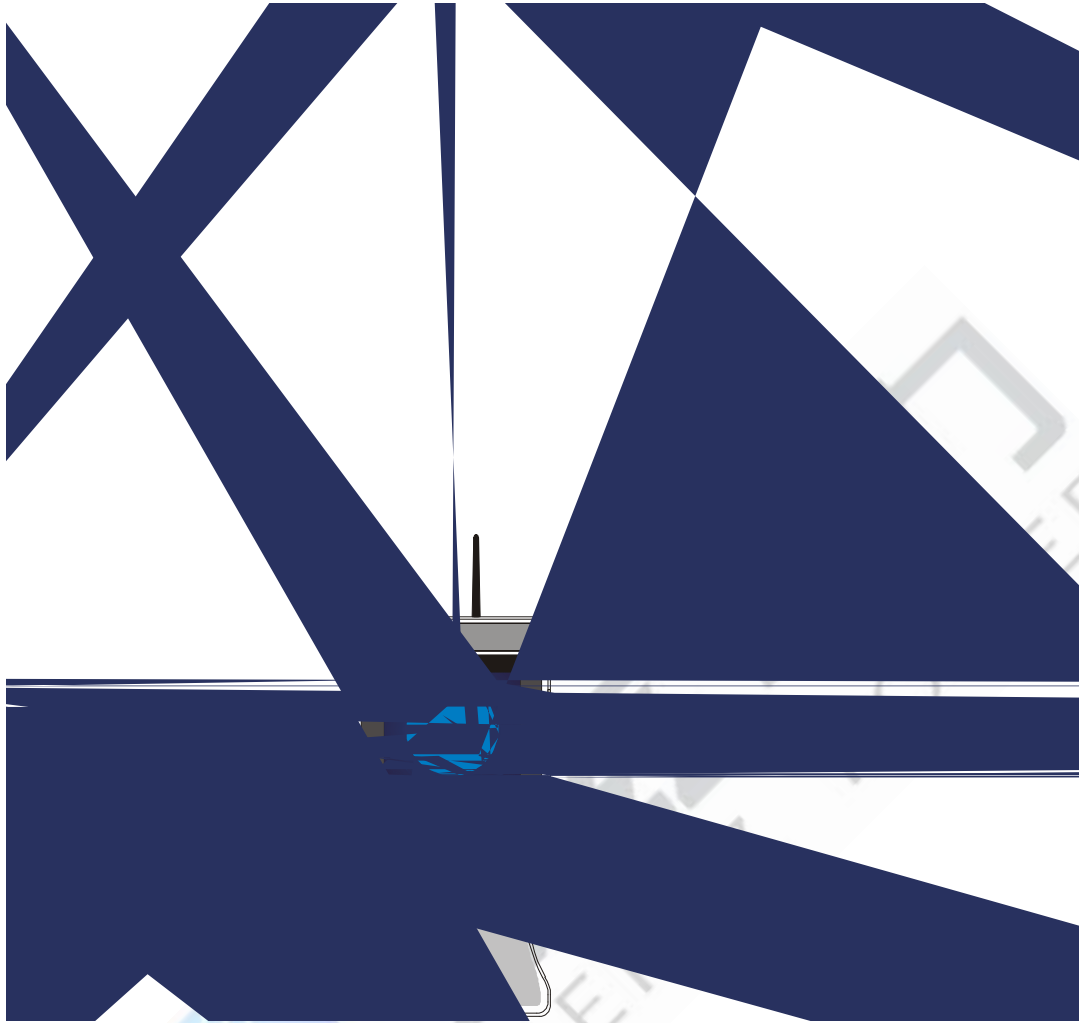

四、操作

1

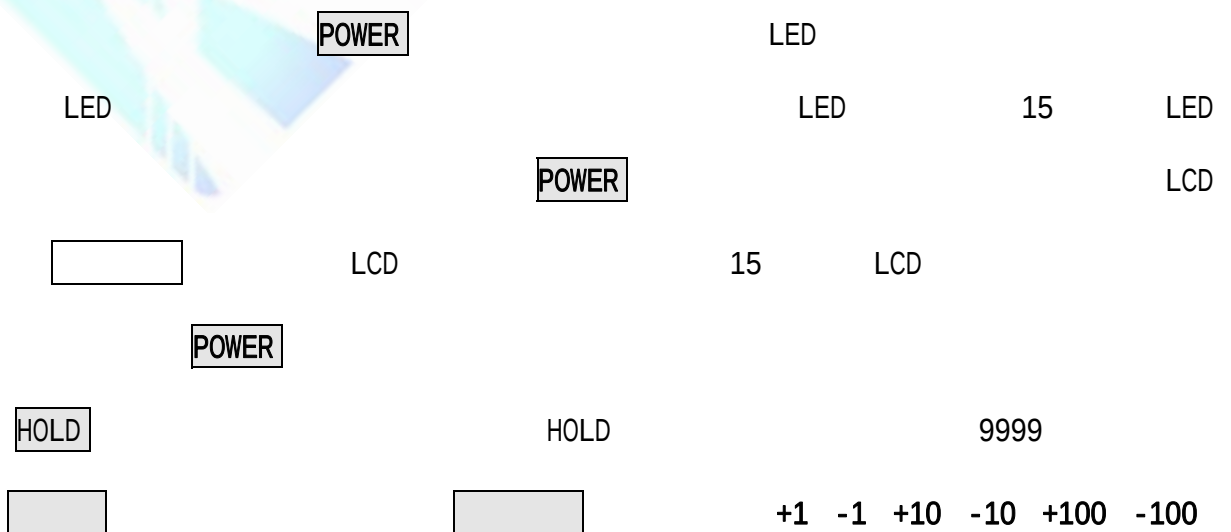



五、 电池管理

-
-
-

3



1

3.2V

4

2

4

3

POWER

2

4

“

”

“

”

1

2

1.

2.



1

2



3

2

24

027-83267669

24

48

4

